


MAROTTE CARVED PANELS INSTALLATION GUIDE LINE

Storage and handling


Flat storage is the best. It is recommanded to store the panels in an atmospherically stabilized room to avoid extrem fluctuations of humidity. Prior to installation, the panels must be stabilized to ambiant conditions. Store them for at list 48 hours in a flat position in the place where they will be installed.

Installation

We recommand to install the panels with split battens runing horizontaly every +/- 50cm - see sketch below. We also recommand to leave a void between panels and the wall in order to allow air to circulate.

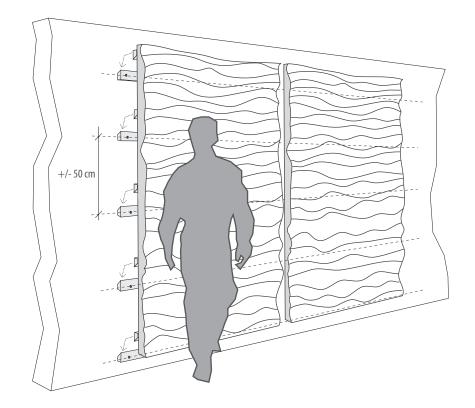

Detail 1



Detail 2



OBER S.A. Longeville en Barrois 55014 Bar-le-Duc Cedex France Tél. : +33 (0)3 29 76 77 78

www.ober-surfaces.com